


Blocking Diode

DKA40AA220 (20A/2200V)




Applications

- ▶ String box for Solar (PV) power generation
- ▶ Reverse current prevention for DC line such as electric storage equipment

Features

- DC1000V string
Suitable for solar power system
Efficiently protects solar cell modules and prevents power output
- Unique terminal layout allows easy wiring.
- Usage of high voltage strings enables reduction of number and length of strings in the total system.
- Adoption of newly developed diode chip enables better V_F and thermal impedance.
- VRRM 2200V, 2 in isolated package
- Low V_F . $V_F(\text{typ.})=0.87\text{V}(I_F=10\text{A}, T_j=25^\circ\text{C})$

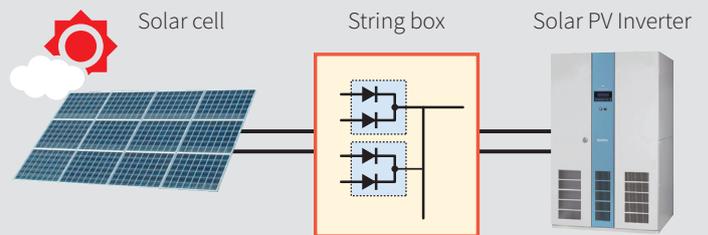

According to IEC60364-7-712 standard, maximum voltage must be twice the open circuit string voltage. ($U_{OC\text{ STC}}$)

Blocking Diode Line-up

String Voltage



For DC450V or less
DG20AA80/120/160



For DC600V to 750V
DKA60KB160



For DC1500V
DKA40BA300

Maximum Ratings

T_j = 25°C unless otherwise specified




Item	Symbol	Unit	DKA40AA220
Repetitive Peak Reverse Voltage	V _{RRM}	V	2200
DC Reverse Voltage	V _{R(DC)}	V	2000

Item	Symbol	Unit	Rating	Conditions
Average Forward Current	per Module	I _{F(AV)}	A	DC T _c =125°C
	per Chip			
Surge Forward Current	I _{FSM}	A	985/1080	1/2 cycle, 50/60Hz, Peak value, non-repetitive
I ² t (for fusing)	I ² t	A ² s	4860	Value for one cycle of surge current
Operating Junction Temperature	T _j	°C	- 40 to +150	
Storage Temperature	T _{stg}	°C	- 40 to +125	
Isolation Breakdown Voltage	V _{iso}	V	3000	AC RMS 1minute
Mounting Torque	Mounting (M6)	N · m (kgf · cm)	4.7 (48)	Recommended value 2.5 to 3.9 (25 to 40)
	Terminal (M5)		2.7 (28)	Recommended value 1.5 to 2.5 (15 to 25)
Mass		g	170	Typical value

Electrical Characteristics

T_j = 25°C unless otherwise specified

Item	Symbol	Unit	Rating			Conditions
			Min.	Typ.	Max.	
Repetitive Peak Reverse Current	I _{RRM}	mA			10	V _R = V _{RRM} , T _j = 150°C
Forward Voltage Drop	V _{FM}	V		0.87	1.10	I _F = 10A, Inst. measurement
				0.92	1.15	I _F = 20A, Inst. measurement
Thermal Impedance	R _{th(j-c)}	°C/W			0.65	Junction to heatsink
Thermal Contact Impedance	R _{th(c-f)}			0.09		case to heatsink (per Module) Thermal conductivity of silicone grease ≈ 7 × 10 ⁻³ [W/cm · °C]

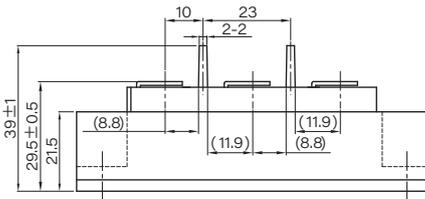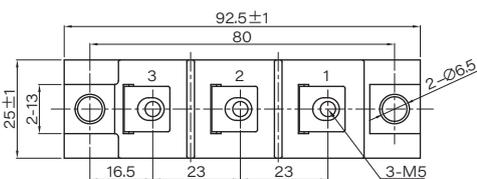

Unit : mm

- SanRex is a trademark or a registered trademark of Sansha Electric Manufacturing Co., Ltd.
- Appearance and specifications of products are subject to change without notice for improvement reasons.

SANSHA ELECTRIC MFG. CO., LTD.



URL: <https://www.sansha.co.jp/>

Head Office (International Sales Department) TEL: +81-6-6325-6621 FAX: +81-6-6325-0503
Tokyo Branch TEL: +81-3-3834-1700 FAX: +81-3-3834-1702
Chubu Sales Office TEL: +81-52-955-5600 FAX: +81-52-955-5650
Kyushu Sales Office TEL: +81-92-431-7586 FAX: +81-92-474-9643
Hokuriku Office TEL: +81-76-293-1725 FAX: +81-76-293-1881

Helsinki Branch (Finland)
 Atomitie 5, Helsinki, 00370, Finland
 TEL: +358-40-1668580 E-mail: info@sanrex.fi
Seoul Branch (Korea)
 #706, 6, Samseong-ro 96-gil, Gangnam-gu Seoul
 06168 Korea
 TEL: +82-2-552-2803 FAX: +82-2-552-8441
Taipei Branch (Taiwan)
 8F-3, No.46, Chung Shan N. Road, Sec. 2, Taipei,
 Taiwan, R.O.C.
 TEL: +886-2-2543-5689 FAX: +886-2-2536-7876

SANSHA SOLUTION SERVICE CO., LTD. (Japan)
 TEL: +81-6-6321-0616 FAX: +81-6-6321-0618
 Service branches: Osaka, Tokyo, Nagoya, Fukuoka
SUWA SANSHA ELECTRIC CO., LTD. (Japan)
 TEL: +81-266-82-6600 FAX: +81-266-73-3322
<https://www.suwa.sansha.co.jp/>
SANREX CORPORATION (U.S.A.)
 TEL: +1-516-625-1313 FAX: +1-516-625-8845
<https://www.sanrex.com/>
SANREX ASIA PACIFIC PTE. LTD. (Singapore)
 TEL: +65-6457-8867 FAX: +65-6459-6425
<https://www.sanrex.sg/>

SANREX LIMITED (Hong Kong)
 TEL: +852-2744-1310 FAX: +852-2785-6009
SANSHA ELECTRIC MFG. (SHANGHAI) CO., LTD. (China)
 TEL: +86-21-5868-1058 FAX: +86-21-5868-1056
SANSHA ELECTRIC MFG. (GUANGDONG) CO., LTD. (China)
 TEL: +86-757-2733-3688 FAX: +86-757-2783-3547
<http://www.sanrex.cn/>
DONGGUAN EASTERN ELECTRONICS CO., LTD. (China)
 TEL: +86-769-8733-8301 FAX: +86-769-8733-8306