

TRIAC(Through Hole / Isolated)

TMG8C80F


SanRex Triac TMG8C80F is designed for full wave AC control applications. It can be used as an ON/OFF function or for phase control operation.

Typical Applications

- Home Appliances : Washing Machines, Vacuum Cleaners, Rice Cookers, Micro Wave Ovens, Hair Dryers, other control applications
- Industrial Use : SMPS, Copier Machines, Motor Controls, Dimmer, SSR, Heater Controls, Vending Machines, other control applications

Features

- $I_T(\text{RMS})=8\text{A}$
- High Surge Current
- Low Voltage Drop
- Lead-Free Package

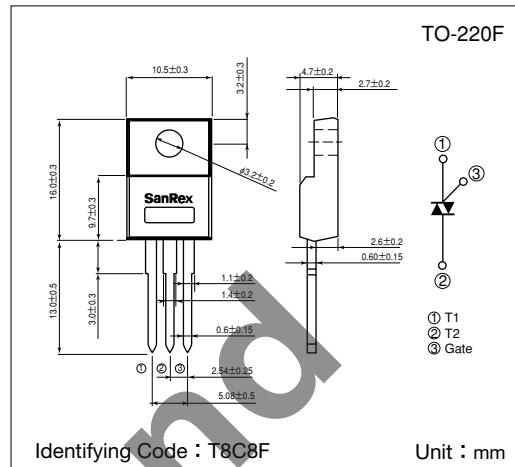

■ Maximum Ratings

Symbol	Item	Reference	Ratings	Unit
V_{DRM}	Repetitive Peak Off-State Voltage		800	V
$I_T(\text{RMS})$	R.M.S. On-State Current	$T_c=89^\circ\text{C}$	8	A
I_{TSM}	Surge On-State Current	One cycle, 50Hz/60Hz, Peak value non-repetitive	80/88	A
I^t	I^t (for fusing)		32	A^2s
P_{GM}	Peak Gate Power Dissipation		5	W
$P_{G(AV)}$	Average Gate Power Dissipation		0.5	W
I_{GM}	Peak Gate Current		2	A
V_{GM}	Peak Gate Voltage		10	V
V_{ISO}	Isolation Breakdown Voltage (R.M.S.)	A.C. 1 minute	1500	V
T_j	Operating Junction Temperature		-40~+125	$^\circ\text{C}$
T_{stg}	Storage Temperature		-40~+150	$^\circ\text{C}$
	Mass		2	g

■ Electrical Characteristics

Symbol	Item	Reference	Ratings			Unit
			Min.	Typ.	Max.	
I_{DRM}	Repetitive Peak Off-State Current	$V_D=V_{DRM}$, Single phase, half wave, $T_j=125^\circ\text{C}$			2	mA
V_{TM}	Peak On-State Voltage	$I_T=12\text{A}$, Inst. measurement			1.4	V
I_{GT1}^+	1	$V_D=6\text{V}$, $R_L=10\Omega$			30	mA
I_{GT1}^-	2				30	
I_{GT3}^+	3				—	
I_{GT3}^-	4				30	
V_{GT1}^+	1	$V_D=6\text{V}$, $R_L=10\Omega$			1.5	V
V_{GT1}^-	2				1.5	
V_{GT3}^+	3				—	
V_{GT3}^-	4				1.5	
V_{GD}	Non-Trigger Gate Voltage	$T_j=125^\circ\text{C}$, $V_D=\frac{1}{2}V_{DRM}$	0.2			V
$[\text{dv}/\text{dt}]_c$	Critical Rate of Rise of Off-State Voltage at Commutation	$T_j=125^\circ\text{C}$, $[\text{di}/\text{dt}]_c=-4\text{A/ms}$, $V_D=400\text{V}$	10			$\text{V}/\mu\text{s}$
I_H	Holding Current				15	mA
R_{th}	Thermal Resistance	Junction to case			3.7	$^\circ\text{C}/\text{W}$

Trigger mode of the triac

