

# TRIAC(Through Hole / Isolated)

# TMG3D60F

(Sensitive Gate)


**SanRex** Triac TMG3D60F is designed for full wave AC control applications. It can be used as an ON/OFF function or for phase control operation.

### Typical Applications

- Home Appliances : Washing Machines, Vacuum Cleaners, Rice Cookers, Micro Wave Ovens, Hair Dryers, other control applications
- Industrial Use : SMPS, Copier Machines, Motor Controls, Dimmer, SSR, Heater Controls, Vending Machines, other control applications

### Features

- $I_{T(RMS)}=3A$
- High Surge Current
- Low Voltage Drop
- Lead-Free Package

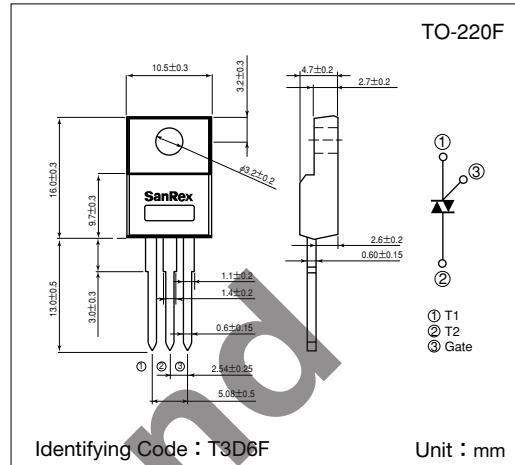

### Maximum Ratings

( $T_j=25^\circ\text{C}$  unless otherwise specified)

Symbol	Item	Reference	Ratings	Unit
$V_{DRM}$	Repetitive Peak Off-State Voltage		600	V
$I_{T(RMS)}$	R.M.S. On-State Current	$T_c=107^\circ\text{C}$	3	A
$I_{TSM}$	Surge On-State Current	One cycle, 50Hz/60Hz, Peak value non-repetitive	27/30	A
$I_{ft}$	$I_{ft}$ (for fusing)		3.7	$\text{A}^2\text{s}$
$P_{GM}$	Peak Gate Power Dissipation		1.5	W
$P_{G(AV)}$	Average Gate Power Dissipation		0.1	W
$I_{GM}$	Peak Gate Current		1	A
$V_{GM}$	Peak Gate Voltage		7	V
$V_{ISO}$	Isolation Breakdown Voltage (R.M.S.)	A.C. 1 minute	1500	V
$T_j$	Operating Junction Temperature		-40~+125	$^\circ\text{C}$
$T_{stg}$	Storage Temperature		-40~+150	$^\circ\text{C}$
	Mass		2	g

### Electrical Characteristics

Symbol	Item	Reference	Ratings			Unit
			Min.	Typ.	Max.	
$I_{DRM}$	Repetitive Peak Off-State Current	$V_D=V_{DRM}$ , Single phase, half wave, $T_j=125^\circ\text{C}$			1	mA
$V_{TM}$	Peak On-State Voltage	$I_T=4.5\text{A}$ , Inst. measurement			1.4	V
$I_{GT1}^+$ 1	Gate Trigger Current	$V_D=6\text{V}$ , $R_L=10\Omega$			5	mA
$I_{GT1}^-$ 2					5	
$I_{GT3}^+$ 3					10	
$I_{GT3}^-$ 4					5	
$V_{GT1}^+$ 1					1.5	V
$V_{GT1}^-$ 2					1.5	
$V_{GT3}^+$ 3					2.0	
$V_{GT3}^-$ 4					1.5	
$V_{GD}$	Non-Trigger Gate Voltage	$T_j=125^\circ\text{C}$ , $V_D=\frac{1}{2}V_{DRM}$	0.2			V
$(dv/dt)_c$	Critical Rate of Rise of Off-State Voltage at Commutation	$T_j=125^\circ\text{C}$ , $(di/dt)_c=-1.5\text{A/ms}$ , $V_D=\frac{2}{3}V_{DRM}$	5			$\text{V}/\mu\text{s}$
$I_H$	Holding Current			2		mA
$R_{th(j-c)}$	Thermal Resistance	Junction to case			5	$^\circ\text{C/W}$

Trigger mode of the triac

