

TRIAC(Through Hole)

TMG1C60 5

(Sensitive Gate)


SanRex Triac TMG1C60 5 is designed for full wave AC control applications. It can be used as an ON/OFF function or for phase control operation.

Typical Applications

- Home Appliances : Washing Machines, Vacuum Cleaners, Rice Cookers, Micro Wave Ovens, Hair Dryers, other control applications
- Industrial Use : SMPS, Copier Machines, Motor Controls, Dimmer, SSR, Heater Controls, Vending Machines, other control applications

Features

- $I_{T(RMS)}=1A$
- High Surge Current

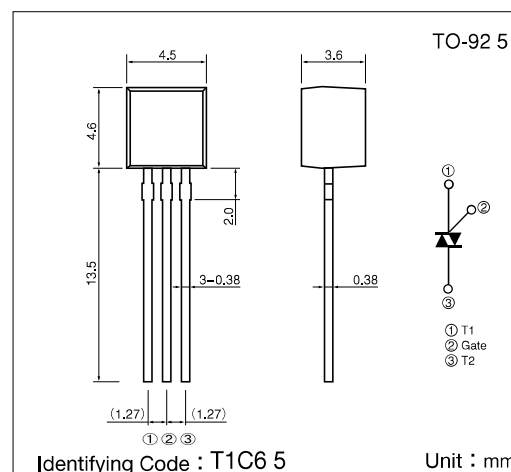

Maximum Ratings

(Tj=25°C unless otherwise specified)

Symbol	Item	Reference	Ratings	Unit
V_{DRM}	Repetitive Peak Off-State Voltage		600	V
$I_{T(RMS)}$	R.M.S. On-State Current	$T_c=58^\circ C$	1	A
I_{TSM}	Surge On-State Current	One cycle, 50Hz/60Hz, Peak value, non-repetitive	9.1/10	A
I^2t	I^2t (for fusing)		0.41	A ² s
P_{GM}	Peak Gate Power Dissipation		1	W
$P_{G(AV)}$	Average Gate Power Dissipation		0.1	W
I_{GM}	Peak Gate Current		0.5	A
V_{GM}	Peak Gate Voltage		6	V
T_j	Operating Junction Temperature		-40~+125	°C
T_{stg}	Storage Temperature		-40~+150	°C
	Mass		0.2	g

Electrical Characteristics

Symbol	Item	Reference	Ratings			Unit	
			Min.	Typ.	Max.		
I _{DRM}	Repetitive Peak Off-State Current	V _D =V _{DRM} , Single phase, half wave, T _J =125°C			0.5	mA	
V _{TM}	Peak On-State Voltage	I _T =1.5A, Inst. measurement			1.6	V	
I _{GT1} ⁺	1	V _D =6V, R _L =10 Ω			5	mA	
I _{GT1} [−]	2				5		
I _{GT3} ⁺	3				10		
I _{GT3} [−]	4				5		
V _{GT1} ⁺	1		Gate Trigger Voltage			1.8	V
V _{GT1} [−]	2					1.8	
V _{GT3} ⁺	3					2.0	
V _{GT3} [−]	4					1.8	
V _{GD}	Non-Trigger Gate Voltage	T _J =125°C, V _D =½V _{DRM}	0.2			V	
(dv/dt) _c	Critical Rate of Rise of Off-State Voltage at Commutation	T _J =125°C, (di/dt) _c =−0.5A/ms, V _D =⅔V _{DRM}	2			V/μs	
I _H	Holding Current			4		mA	
R _{th} (j-c)	Thermal Resistance	Junction to case			50	°C/W	

Trigger mode of the triac

