

Diode Module

High heat dissipation
(high reliability) model

DCA 200/240DB

(200 A / 240 A 800 V / 1600 V)

High heat dissipation,
High voltage resistance model


DCA 200DB220

(200 A 2200 V)

Super high heat
dissipation model

DCA 240EB

(240 A 800V/1600 V)



Applications

- ▶ Motor Drives
- ▶ Battery Charger
- ▶ Generator
- ▶ Elevator
- ▶ Various Power Supplies
- ▶ Medium Voltage Inverter (DCA200DB220)



Features

■ DCA 200/240DB

Reduces thermal stress on the diode chip thanks to newly designed high heat dissipation structure, thus improving the long term reliability (about twice the power cycle capability compared to previous model).


■ DCA 200DB220

Provides high VRRM (2200V) by using specially designed glass passivation diode chip. Can be used in areas where the power supply (or source) voltage exceeds AC500V.

■ DCA 240EB

Improved heat dissipation thanks to newly designed fewer layer structure and special material for insulation layer, offering easy thermal design for equipment.

■ Lighter package and high heat dissipation thanks to fewer layer structure.

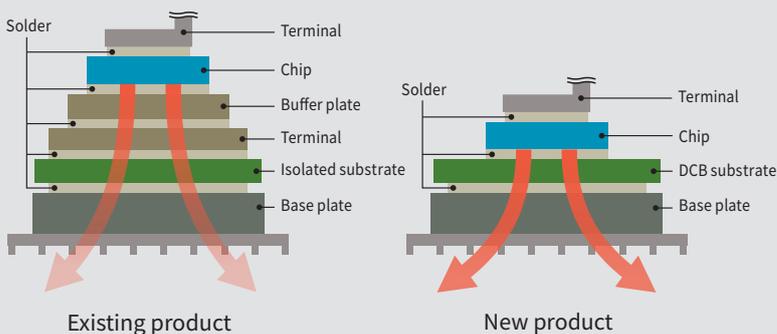

■ Improved long term reliability thanks to removal of two layers and soldering on both sides of chips increase product's reliability (twice as long as existing product) .

20% weight reduction by optimizing the internal design and materials.

■ Using 100% lead-free solder to protect the environment.

Maximum Ratings

Tj = 25 °C unless otherwise specified


Item	Symbol	Unit	DCA200DB80	DCA200DB160	DCA200DB220	DCA240DB80	DCA240DB160	DCA240EB80	DCA240EB160
Repetitive Peak Reverse Voltage	V _{RRM}	V	800	1600	2200	800	1600	800	1600
Non-Repetitive Peak Reverse Voltage	V _{RSM}	V	960	1700	2300	960	1700	960	1700

Item	Symbol	Unit	Rating				Conditions
Average Forward Current	I _{F(AV)}	A	200 (Tc=113°C)	200 (Tc=110°C)	240 (Tc=104°C)	240 (Tc=113°C)	sin.Wave, 180°
RMS Forward Current	I _{F(RMS)}	A	314 (Tc=113°C)	314 (Tc=110°C)	377 (Tc=104°C)	377 (Tc=113°C)	sin.Wave, 180°
Surge On-state Current	I _{FSM}	A	5000/5500				50Hz 10ms/60Hz 8.3ms sin.Wave Peak Value, Non-repetitive
I ² t (for fusing)	I ² t	A ² s	125000				50Hz 10ms/60Hz 8.3ms sin.Wave
Isolation Voltage	V _{ISO}	V	2500				Terminals to case, AC RMS 1minute
Operating Junction Temperature	T _j	°C	- 40 ~ + 150				
Storage Temperature	T _{stg}	°C	- 40 ~ + 125				
Mass	—	g	180				Typical Value

Electrical Characteristics

Tj = 25 °C unless otherwise specified

Item	Symbol	Unit	Rating(Max.)				Conditions
Reverse Current	I _r	mA	50				T _j =T _{jmax} , V _R =V _{RRM} , Per Leg
Forward Voltage	V _F	V	1.3 (I _F =620A)	1.4 (I _F =620A)	1.35 (I _F =750A)		Per Leg
Threshold Voltage	V _(TO)	V	0.94	0.92	0.93	0.93	
Slope Resistance	r _t	mΩ	0.58	0.78	0.55	0.55	
Thermal Resistance	R _{th(j-c)}	°C/W	0.15	0.15	0.15	0.12	Junction to Case(Per Leg)
Interface Thermal Resistance	R _{th(c-f)}	°C/W	0.10				Case to Heat sink(Per Module) Thermal conductivity (Silicone grease)=9×10 ⁻³ (W/cm·°C)

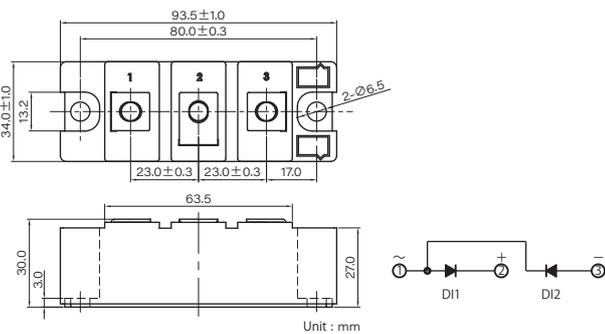

- SanRex is a trademark or a registered trademark of Sansha Electric Manufacturing Co., Ltd.
- Appearance and specifications of products are subject to change without notice for improvement reasons.

Other Products

Diode /KD/DKA/DD/DAF SERIES



Sansha Electric Manufacturing Co., Ltd.
<https://www.sansha.co.jp/>



Headquarters / branches / sales offices

Headquarters (International Sales Department)
 TEL: +81-6-6325-6621 FAX: +81-6-6325-0503
Tokyo Branch
 TEL: +81-3-3834-1700 FAX: +81-3-3834-1702

Chubu Sales Office
 TEL: +81-52-955-5600 FAX: +81-52-955-5650
Kyushu Sales Office
 TEL: +81-92-431-7586 FAX: +81-92-474-9643
Hokuriku Office
 TEL: +81-76-293-1725 FAX: +81-76-293-1881

Plants

Shiga Plant
 TEL: +81-77-583-8632 FAX: +81-77-583-5395
Okayama Plant
 TEL: +81-868-36-3111 FAX: +81-868-36-3065

Helsinki Branch (Finland)
 Atomitie 5, Helsinki, 00370, Finland
 TEL: +358-40-1668580 E-mail: info@sanrex.fi

Seoul Branch (Korea)
 #706, 6, Samseong-ro 96-gil, Gangnam-gu Seoul 06168 Korea
 TEL: +82-2-552-2803 FAX: +82-2-552-8441

Taipei Branch (Taiwan)
 8F-3, No.46, Chung Shan N. Road, Sec. 2, Taipei, Taiwan, R.O.C.
 TEL: +886-2-2543-5689 FAX: +886-2-2536-7876

SANSHA SOLUTION SERVICE CO., LTD. (Japan)
 TEL: +81-6-6321-0616 FAX: +81-6-6321-0618
 Service branches: Osaka, Tokyo, Nagoya, Fukuoka

SUWA SANSHA ELECTRIC CO., LTD. (Japan)
 TEL: +81-266-82-6600 FAX: +81-266-73-3322
<https://www.suwa.sansha.co.jp/>

SANREX CORPORATION (U.S.A.)
 TEL: +1-516-625-1313 FAX: +1-516-625-8845
<https://www.sanrex.com/>

SANREX ASIA PACIFIC PTE. LTD. (Singapore)
 TEL: +65-6457-8867 FAX: +65-6459-6425
<https://www.sanrex.sg/>

SANREX LIMITED (Hong Kong)
 TEL: +852-2744-1310 FAX: +852-2785-6009

SANSHA ELECTRIC MFG. (SHANGHAI) CO., LTD. (China)
 TEL: +86-21-5868-1058 FAX: +86-21-5868-1056

SANSHA ELECTRIC MFG. (GUANGDONG) CO., LTD. (China)
 TEL: +86-757-2733-3688 FAX: +86-757-2783-3547
<http://www.sanrex.cn/>

DONGGUAN EASTERN ELECTRONICS CO., LTD. (China)
 TEL: +86-769-8733-8301 FAX: +86-769-8733-8306

If you have any questions, please contact the following or our branches or sales offices.